



C.I.P.**9,3 x 62**

Ursprungsland: DE

TAB. I

Datum 84-06-14

Revision 02-05-15

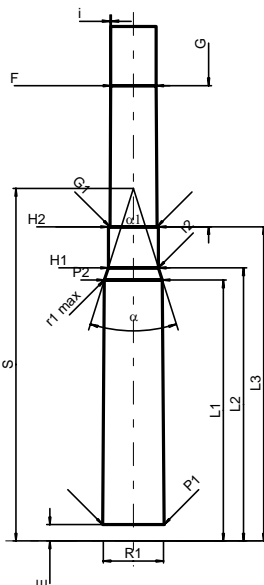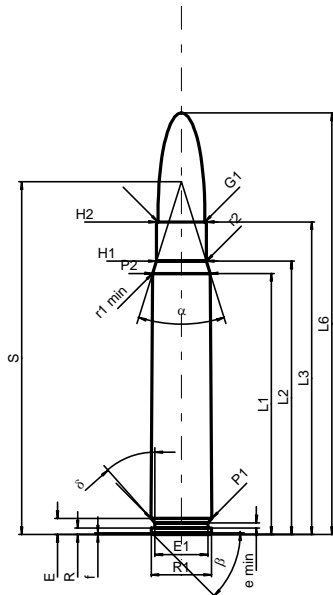

Maßstab 1:1.5

Maße in << mm >>
Maße und Toleranzen für Messläufe
siehe Anhang CR 1.

PATRONE MAXI**Längen**

L1 ^{1)*}	=	51.79	-0.20
L2 ^{1)*}	=	54.22	-0.20
L3 ¹⁾	=	62.00	
L4	=		
L5	=	65.10	
L6	=	83.60	

Hülsenboden

R	=	1.30	
R1	=	11.95	
R3	=		
E	=	3.20	
E1	=	10.50	
e min	=	1.00	
delta	=	41°37'48"	
f	=	0.30	
beta	=	45°	

Pulverkammer

P1	=	12.10	
P2 ^{1)*}	=	11.45	-0.20

Schulterkonus

alpha	=	34°56'58"	
S	=	69.98	
r1 min	=	0.50	
r2	=	0.50	

Hülsenhals

H1 *	=	9.92	
H2 ¹⁾	=	9.92	

Geschoss

G1 ¹⁾	=	9.30	
G2	=	9.30	
F	=		
L3+G ¹⁾	=	90.00	

Drücke (Energien)**Mech. elektr. Wandler**

Pmax	=	3900 bar	
PK	=	4485 bar	
PE	=	4875 bar	
M	=	25.00	
EE	=	5335 Joule	

Verschiedene Daten

Fe ¹⁾	=	0.10	
delta L	=		

PATRONENLAGER MINI**Längen**

L1 *	=	51.75	
L2 *	=	54.17	
L3 ¹⁾	=	62.30	

Stoßboden

R	=	1.30	
R1	=	12.00	
R2	=		
R3	=		
r	=		

Pulverkammer

E	=	3.20	
P1 ¹⁾	=	12.13	
P2 *	=	11.48	

Schulterkonus

alpha ¹⁾	=	35°05'06"	
S	=	69.91	
r1 max	=	0.50	
r2	=	0.50	

Hülsenhals

H1 *	=	9.95	
H2 ¹⁾	=	9.94	

Geschossübergang

G1 ^{1)*}	=	9.35	
G ^{1)*}	=	28.00	
alpha1	=	180°	
h	=		
s	=		
i ¹⁾	=	0°21'29"	
w	=		

Lauf

F ^{1)*}	=	9.00	
Z ¹⁾	=	9.28	

Züge

b	=	4.60	
N	=	4	
u	=	360.00	
Q	=	66.32	mm ²

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen
* Grundmaße