


C.I.P.**6 mm PPC**

TAB. I

Date 84-06-14

Pays d'origine: US

Révision 02-05-15

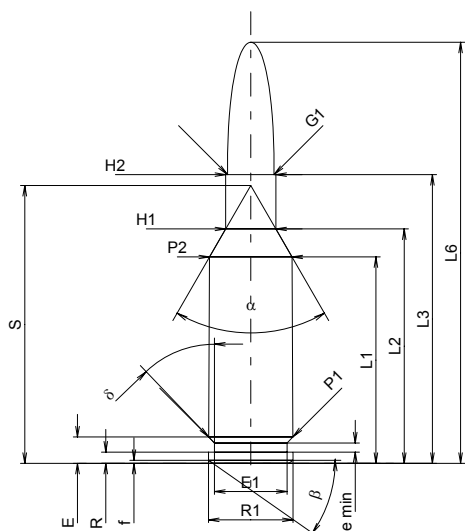**CARTOUCHE MAXI****Longueurs**

L1 ¹⁾	=	27.30	-0.20
L2 ¹⁾	=	31.00	-0.20
L3 ¹⁾	=	38.18	
L4	=		
L5	=		
L6	=	55.70	

Culot

R	=	1.50	
R1	=	11.18	
R3	=		
E	=	3.50	
E1	=	9.60	
e min	=	1.20	
delta	=	43°43'12"	
f	=	0.40	
beta	=	35°	

Chambre à poudre

P1	=	11.13	
P2 ^{1)*}	=	10.92	-0.20

Cône de raccordement

alpha*	=	60°	
S*	=	36.76	
r1 min	=		
r2	=		

Collet

H1*	=	6.65	
H2 ¹⁾	=	6.65	

Projectile

G1 ¹⁾	=	6.17	
G2	=		
F	=		
L3+G ¹⁾	=	43.76	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	4050 bar	
PK	=	4658 bar	
PE	=	5060 bar	
M	=	17.50	
EE	=	2250 Joule	

Autres indications

Fe ¹⁾	=	0.10	
delta L	=		

CHAMBRE MINI**Longueurs**

L1	=	27.30	
L2	=	31.02	
L3 ¹⁾	=	38.86	

Cuvette

R	=		
R1	=	11.20	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.50	
P1 ¹⁾	=	11.17	
P2*	=	10.95	

Cône de raccordement

alpha ^{1)*}	=	60°	
S*	=	36.78	
r1 max	=	1.52	
r2	=	1.52	

Collet

H1*	=	6.65	
H2 ¹⁾	=	6.65	

Prise de rayures


G1 ^{1)*}	=	6.18	
G ¹⁾	=	5.58	
alpha1*	=	90°	
h	=	0.24	
s	=	2.52	
i ^{1)*}	=	1°30'	
w	=		

Canon

F ^{1)*}	=	6.02	
Z ¹⁾	=	6.17	

Rayures

b	=	2.29	
N	=	6	
u	=	551.00	
Q	=	29.52	mm ²

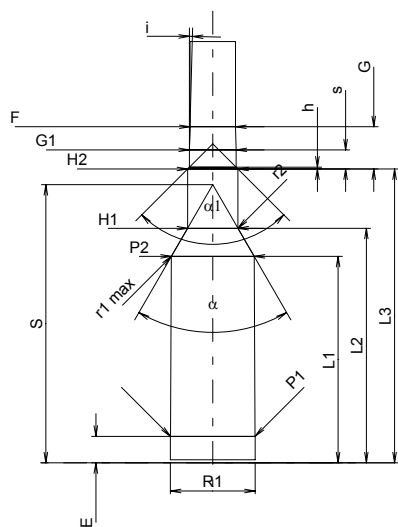

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base