

**C.I.P.****7 x 57 R**

TAB.

II


Datum

84-06-14

Revision

15-05-19

Ursprungsland: DE

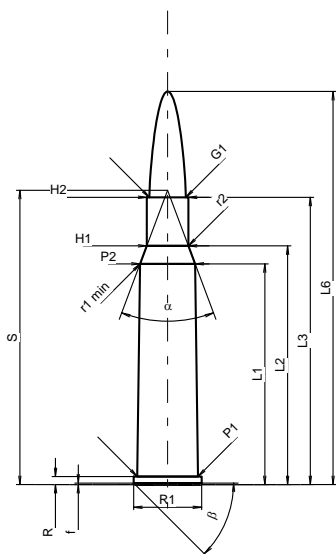**PATRONE MAXI****Längen**

L1	=	43.80
L2	=	47.37
L3 <sup>1)</sup>	=	57.00
L4	=	
L5	=	
L6	=	78.00

**Hülsenboden**

R <sup>1)</sup>	=	1.60	-0.25
R1	=	13.50	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.30	
beta	=	45°	

**Pulverkammer**

P1	=	12.05
P2 *	=	10.92

**Schulterkonus**

alpha *	=	41°00'24"
S	=	58.40
r1 min	=	0.50
r2	=	0.50

**Hülsenhals**

H1 *	=	8.25
H2 <sup>1)</sup>	=	8.25

**Geschoss**

G1 <sup>1)</sup>	=	7.25
G2	=	
F	=	
L3+G <sup>1)</sup>	=	76.69

**Drücke (Energien)****Mech. elektr. Wandler**

Pmax	=	3400 bar
PK	=	3910 bar
PE	=	4250 bar
M	=	25.00
EE	=	3390 Joule

**Verschiedene Daten**

Fe <sup>1)4)</sup>	=	0.15
delta L	=	

**PATRONENLAGER MINI****Längen**

L1	=	43.80
L2	=	47.37
L3 <sup>1)</sup>	=	57.30

**Stoßboden**

R <sup>1)</sup>	=	1.60
R1	=	13.55
R2	=	
R3	=	
r	=	

**Pulverkammer**

E	=	
P1 <sup>1)</sup>	=	12.08
P2 *	=	10.95

**Schulterkonus**

alpha <sup>1)*</sup>	=	41°00'25"
S	=	58.44
r1 max	=	0.50
r2	=	0.50

**Hülsenhals**

H1 *	=	8.28
H2 <sup>1)</sup>	=	8.27

**Geschossübergang**


G1 <sup>1)*</sup>	=	7.30
G <sup>1)</sup>	=	19.69
alpha 1	=	90°
h *	=	0.49
s	=	
i <sup>1)*</sup>	=	0°28'38"
w	=	

**Lauf**

F <sup>1)*</sup>	=	6.98
Z <sup>1)</sup>	=	7.24

**Züge**

b	=	3.70
N	=	4
u *	=	220.00
Q	=	40.29 mm <sup>2</sup>

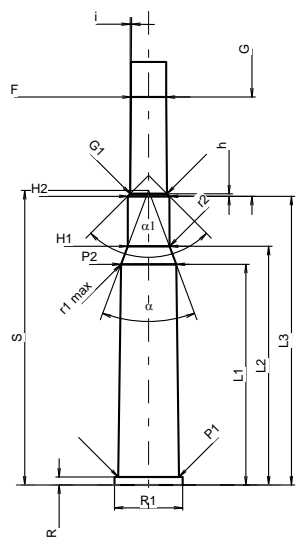

Maßstab 1:1.5

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
4) Verschlussabstand an Rand  
\* Grundmaße