


**C.I.P.****5,6 x 50 R Mag.**

TAB. II

Datum 98-02-20

Revision 02-05-15

Ursprungsland: DE

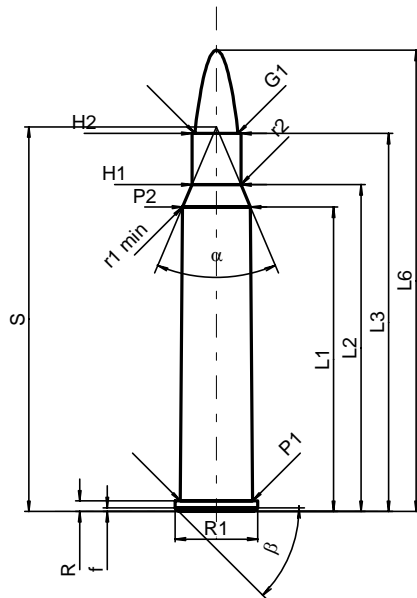**PATRONE MAXI****Längen**

L1*	=	40.26
L2*	=	43.23
L3 <sup>1)</sup>	=	50.00
L4	=	
L5	=	
L6	=	61.00

**Hülsenboden**

R <sup>1)</sup>	=	1.40	-0.25
R1	=	10.90	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.50	
beta	=	45°	

**Pulverkammer**

P1	=	9.59
P2*	=	9.00

**Schulterkonus**

alpha	=	45°58'38"
S	=	50.87
r1 min	=	0.50
r2	=	0.50

**Hülsenhals**

H1*	=	6.48
H2 <sup>1)</sup>	=	6.48

**Geschoss**

G1 <sup>1)</sup>	=	5.70
G2	=	
F	=	
L3+G <sup>1)</sup>	=	51.80

**Drücke (Energien)****Mech. elektr. Wandler**

Pmax	=	3400 bar
PK	=	3910 bar
PE	=	4250 bar
M	=	25.00
EE	=	1950 Joule

**Verschiedene Daten**

Fe <sup>1)</sup>	=	0.15
delta L	=	

**PATRONENLAGER MINI****Längen**

L1*	=	40.26
L2*	=	43.21
L3 <sup>1)</sup>	=	50.30

**Stoßboden**

R <sup>1)</sup>	=	1.40
R1	=	10.93
R2	=	
R3	=	
r	=	

**Pulverkammer**

E	=	
P1 <sup>1)</sup>	=	9.62
P2*	=	9.03

**Schulterkonus**

alpha	=	45°55'40"
S	=	50.92
r1 max	=	0.50
r2	=	0.50

**Hülsenhals**

H1*	=	6.53
H2 <sup>1)</sup>	=	6.51

**Geschossübergang**


G1 <sup>1)*</sup>	=	5.74
G <sup>1)*</sup>	=	1.80
alpha1	=	180°
h	=	
s	=	
i <sup>1)</sup>	=	2°51'45"
w	=	

**Lauf**

F <sup>1)*</sup>	=	5.56
Z <sup>1)</sup>	=	5.69

**Züge**

b	=	2.00
N	=	6
u	=	350.00
Q	=	25.08 mm <sup>2</sup>

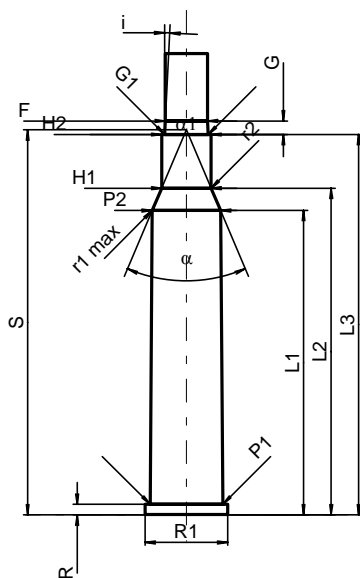

Maßstab 1:1

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
\* Grundmaße