



<b>C.I.P.</b>	<b>Cal. 4</b>	<b>TAB. VII</b>
		<b>Date 89-01-19</b>
		<b>Revision 06-09-19</b>

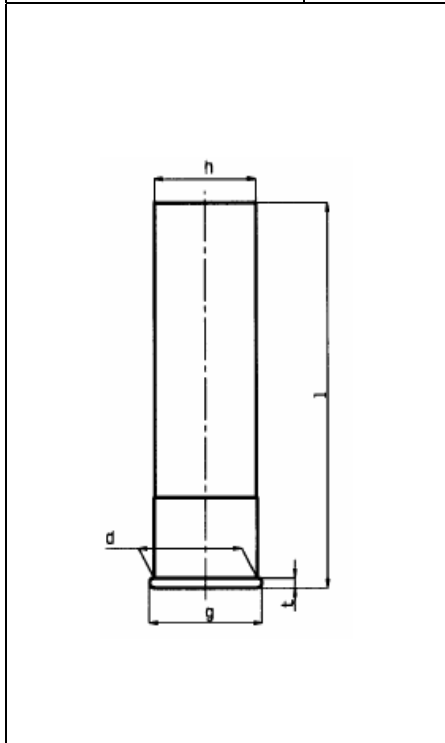

**CARTRIDGE MAXIMALE**

Dimens.	Value	Toler.	
d <sup>1)</sup>	= 27.60	- 0.25	
g	= 30.45	- 0.45	
t <sup>1)</sup>	= 3.25	- 0.40	Marking
h	= 26.20	- 0.45	
l	= 82.40	- 2.50	4/82
l	= 101.00	- 2.50	4/101

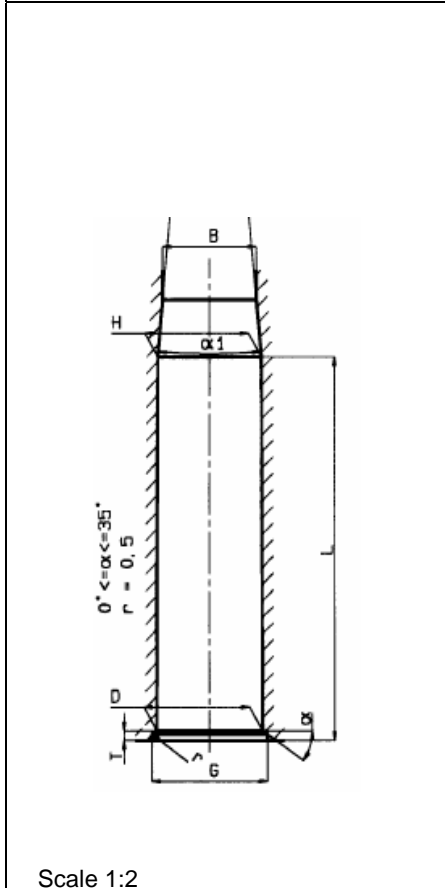

**CHAMBER MINIMALE**

Dimens.	Value	Toler.		
D <sup>1)</sup>	= 27.70	+ 0.10		
G	= 30.50	+ 0.10		
T <sup>1)</sup>	= 3.30	+ 0.10		
H <sup>1)</sup>	= 26.30	+ 0.10	Marking	Pressure transducer
B <sup>1)</sup>	= 23.35	+ 0.70		Pmax PK PE M
alpha 1 <sup>1)</sup>	= 10°30'	max		bar
L <sup>1)</sup>	= 82.60	+ 2.00	4/82	1050 1200 1320 25/30
L <sup>1)</sup>	= 101.20	+ 2.00	4/101	1050 1200 1320 25/30

Headspace		
Fe	= 0.10	Proof Barrel
Fe <sup>1)</sup>	= 0.20	with bascule
Fe <sup>1)</sup>	= 0.35	automatic

Scale 1:2

Dimensions in « mm »  
 Dimensions and tolerances for Proof Barrels:  
 See Appendix CR 4.

Notes: 1) Check for safety reasons