



<b>C.I.P.</b>	<b>Cal. 32 RUS</b>	<b>TAB.</b>	<b>VII</b>
		<b>Date</b>	<b>99-04-20</b>
		<b>Revision</b>	<b>06-09-19</b>

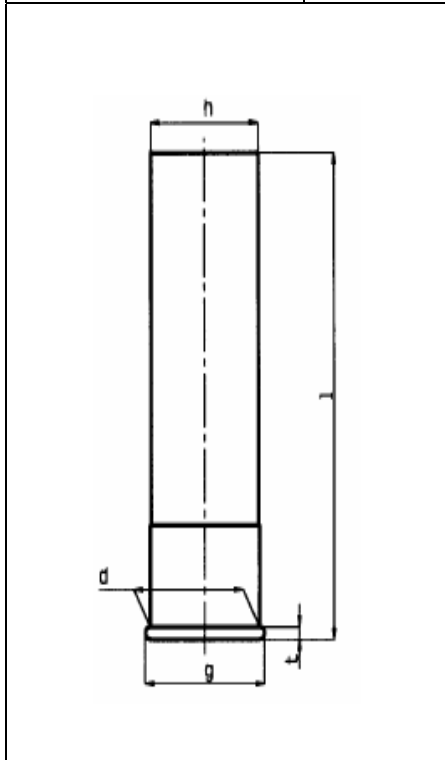

**CATRIDGE MAXIMALE**

Dimens.	Value	Toler.	
d <sup>1)</sup>	= 13.60	- 0.20	
g	= 15.40	- 0.20	
t <sup>1)</sup>	= 1.50	- 0.30	Marking
h	= 13.25	- 0.35	
l	= 65.00	- 2.50	32/65 RUS
l	= 69.80	- 2.50	32/70 RUS

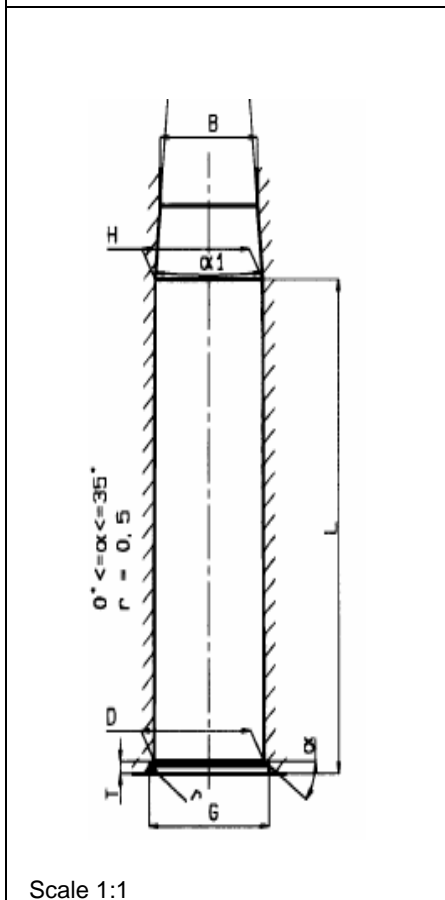

**CHAMBER MINIMALE**

Dimens.	Value	Toler.		
D <sup>1)</sup>	= 13.60	+ 0.10		
G	= 15.50	+ 0.20		
T <sup>1)</sup>	= 1.50	+ 0.10		
H <sup>1)</sup>	= 13.30	+ 0.10	Marking	Pressure transducer
B <sup>1)</sup>	= 12.50	+ 0.30		Pmax PK PE M
alpha 1 <sup>1)</sup>	= 10°30'	max		bar
L <sup>1)</sup>	= 65.10	+ 2.00	32/65 RUS	830 950 1040 17
L <sup>1)</sup>	= 69.90	+ 2.00	32/70 RUS	830 950 1040 17

<b>Headspace</b>		
Fe	= 0.10	Proof Barrel
Fe <sup>1)</sup>	= 0.20	with bascule
Fe <sup>1)</sup>	= 0.35	automatic

Scale 1:1

Dimensions in « mm »  
 Dimensions and tolerances for Proof Barrels:  
 See Appendix CR 4.

Notes : 1) Check for safety reasons