



| | | | |
|---------------|----------------|-----------------|-----------------|
| C.I.P. | Cal. 20 | TAB. | VII |
| | | Date | 84-06-14 |
| | | Revision | 07-05-14 |

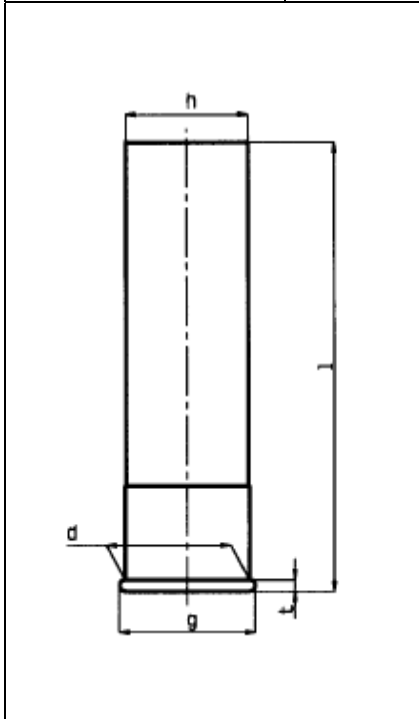

CARTRIDGE MAXIMALE

| | | | |
|-----------------|---------|--------|---------|
| Dimens. | Value | Toler. | |
| d ¹⁾ | = 17.70 | - 0.22 | |
| g | = 19.40 | - 0.40 | |
| t ¹⁾ | = 1.55 | - 0.35 | Marking |
| h | = 17.35 | - 0.49 | |
| l | = 65.00 | - 2.50 | 20/65 |
| l | = 67.50 | - 2.50 | 20/67 |
| l | = 69.80 | - 2.50 | 20/70 |
| l | = 76.00 | - 2.50 | 20/76 |
| l | = 88,70 | - 2,50 | 20/89 |

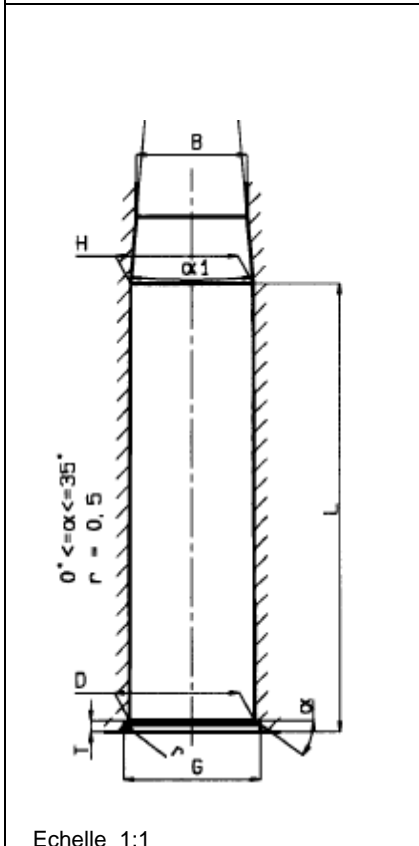

CHAMBER MINIMALE

| | | | | |
|-----------------------|----------|--------|---------|----------------------|
| Dimens. | Value | Toler. | | |
| D ¹⁾ | = 17.75 | + 0.10 | | |
| G | = 19.50 | + 0.10 | | |
| T ¹⁾ | = 1.55 | + 0.10 | | |
| H ¹⁾ | = 17.40 | + 0.10 | Marking | Pressure transducer |
| B ¹⁾ | = 15.70 | + 0.50 | | Pmax PK PE M |
| alpha 1 ¹⁾ | = 10°30' | max | | bar |
| L ¹⁾ | = 65.10 | + 2.00 | 20/65 | 830 950 1040 25/30 |
| L ¹⁾ | = 67.60 | + 2.00 | 20/67 | 830 950 1040 25/30 |
| L ¹⁾ | = 69.90 | + 2.00 | 20/70 | 830 950 1040 25/30 |
| L ¹⁾ | = 76.20 | + 2.00 | 20/76 | 1050 1200 1320 25/30 |
| L ¹⁾ | = 88,90 | + 2,00 | 20/89 | 1050 1200 1320 25/30 |

| | | |
|------------------|--------|--------------|
| Headspace | | |
| Fe | = 0.10 | Proof Barrel |
| Fe ¹⁾ | = 0.20 | with bascule |
| Fe ¹⁾ | = 0.35 | automatic |

Echelle 1:1

Dimensions en « mm »
Dimensions and tolerances for Proof Barrels :

APPENDIX CR 4

Notes : 1) Check for safety reasons